


**MAX.**  
**200sqm/h**

**FABRIJET**

**FD-1908**

**DIRECT TEXTILE PRINTER**

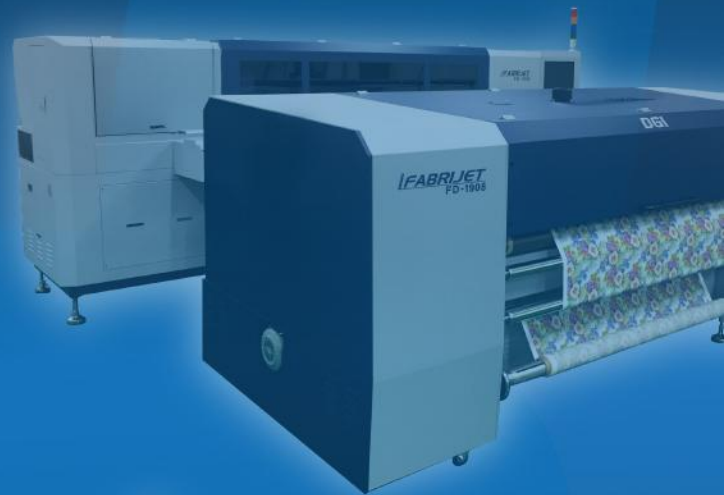

See product information from DGI App & DGI facebook




## Technical Specification

<b>Print Speed</b>	Draft Mode 200 m <sup>2</sup> /hr	Production Mode 110 m <sup>2</sup> /hr	Quality Mode 75 m <sup>2</sup> /hr
<b>Print Resolution</b>	600 x 600dpi (1 Pass)	600 x 1,200dpi (2 Pass)	600 x 1,800dpi (3 Pass)
<b>Max Print Width</b>	1,850 mm		
<b>Max Media Width</b>	1,900 mm		
<b>Print Mode</b>	Bi-Direction / Uni-Direction , Normal / Interleave I, II / DBF I, II, III		
<b>Printhead</b>	Kyocera printhead (8 heads)		
<b>Color</b>	8 Color - Cyan, Magenta, Yellow, Black, Blue, Red, Orange, Gray		
<b>Ink</b>	DGI original water based F210 Ink (Reactive)		
<b>Interface</b>	TCP / IP		
<b>Environmental Range</b>	Temperature : 20~28 °C      Humidity : 40~70% Environment condition may affect on final printing quality.		
<b>Electricity Requirements</b>	Printer : 200~240V/11A      Dryer : 3Phase 380V/40A		

\* All specifications are subject to change without notice.

## Dimension for Installation

	Uncrated				Crated			
	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
<b>Printer</b>	4,410	1,820	2,080	1,630	4,700	2,000	2,150	2,400
<b>Dryer</b>	3,720	1,500	1,600	1,265	4,000	1,800	1,850	1,700

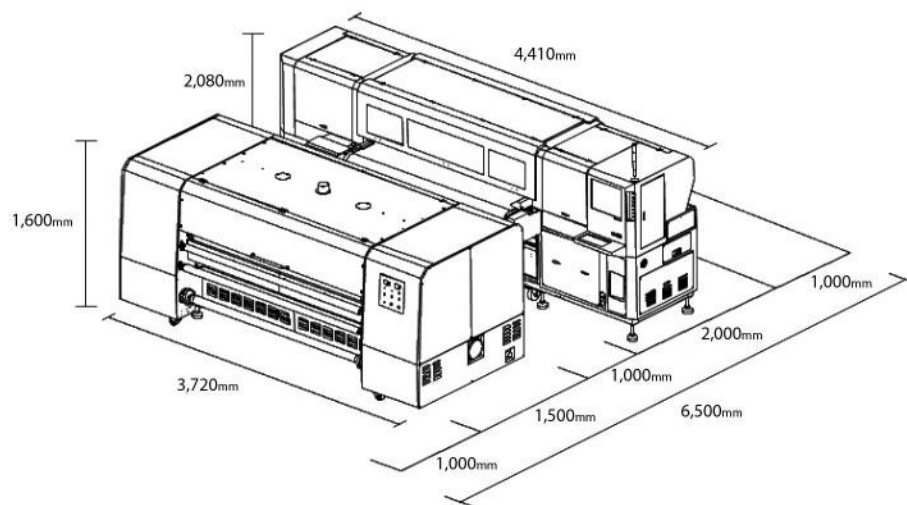

## DGI Original Ink

<b>MODEL</b>	<b>F210</b> (Standard Original)
<b>Type</b>	Water based Reactive
<b>Capacity</b>	5 Kg / Bottle
<b>Color</b>	C, M, Y, K, Red, Orange, Blue, Gray
<b>Compatible</b>	FD-SERIES



52, Cheongdam-Ro, Yangju-si, Gyeonggi-do, Korea, 482-020  
 TEL : +82-31-820-8900    A/S : +82-31-820-8880  
 FAX : +82-31-820-8990    E-MAIL : sales@dgi-net.com

[www.dgi-net.com](http://www.dgi-net.com)  
[www.facebook.com/dgikorea](https://www.facebook.com/dgikorea)



ISO 9001:14001 Certified